


//// TERRACO®



MONOCOTE

The House of Scandinavian Finishing Materials

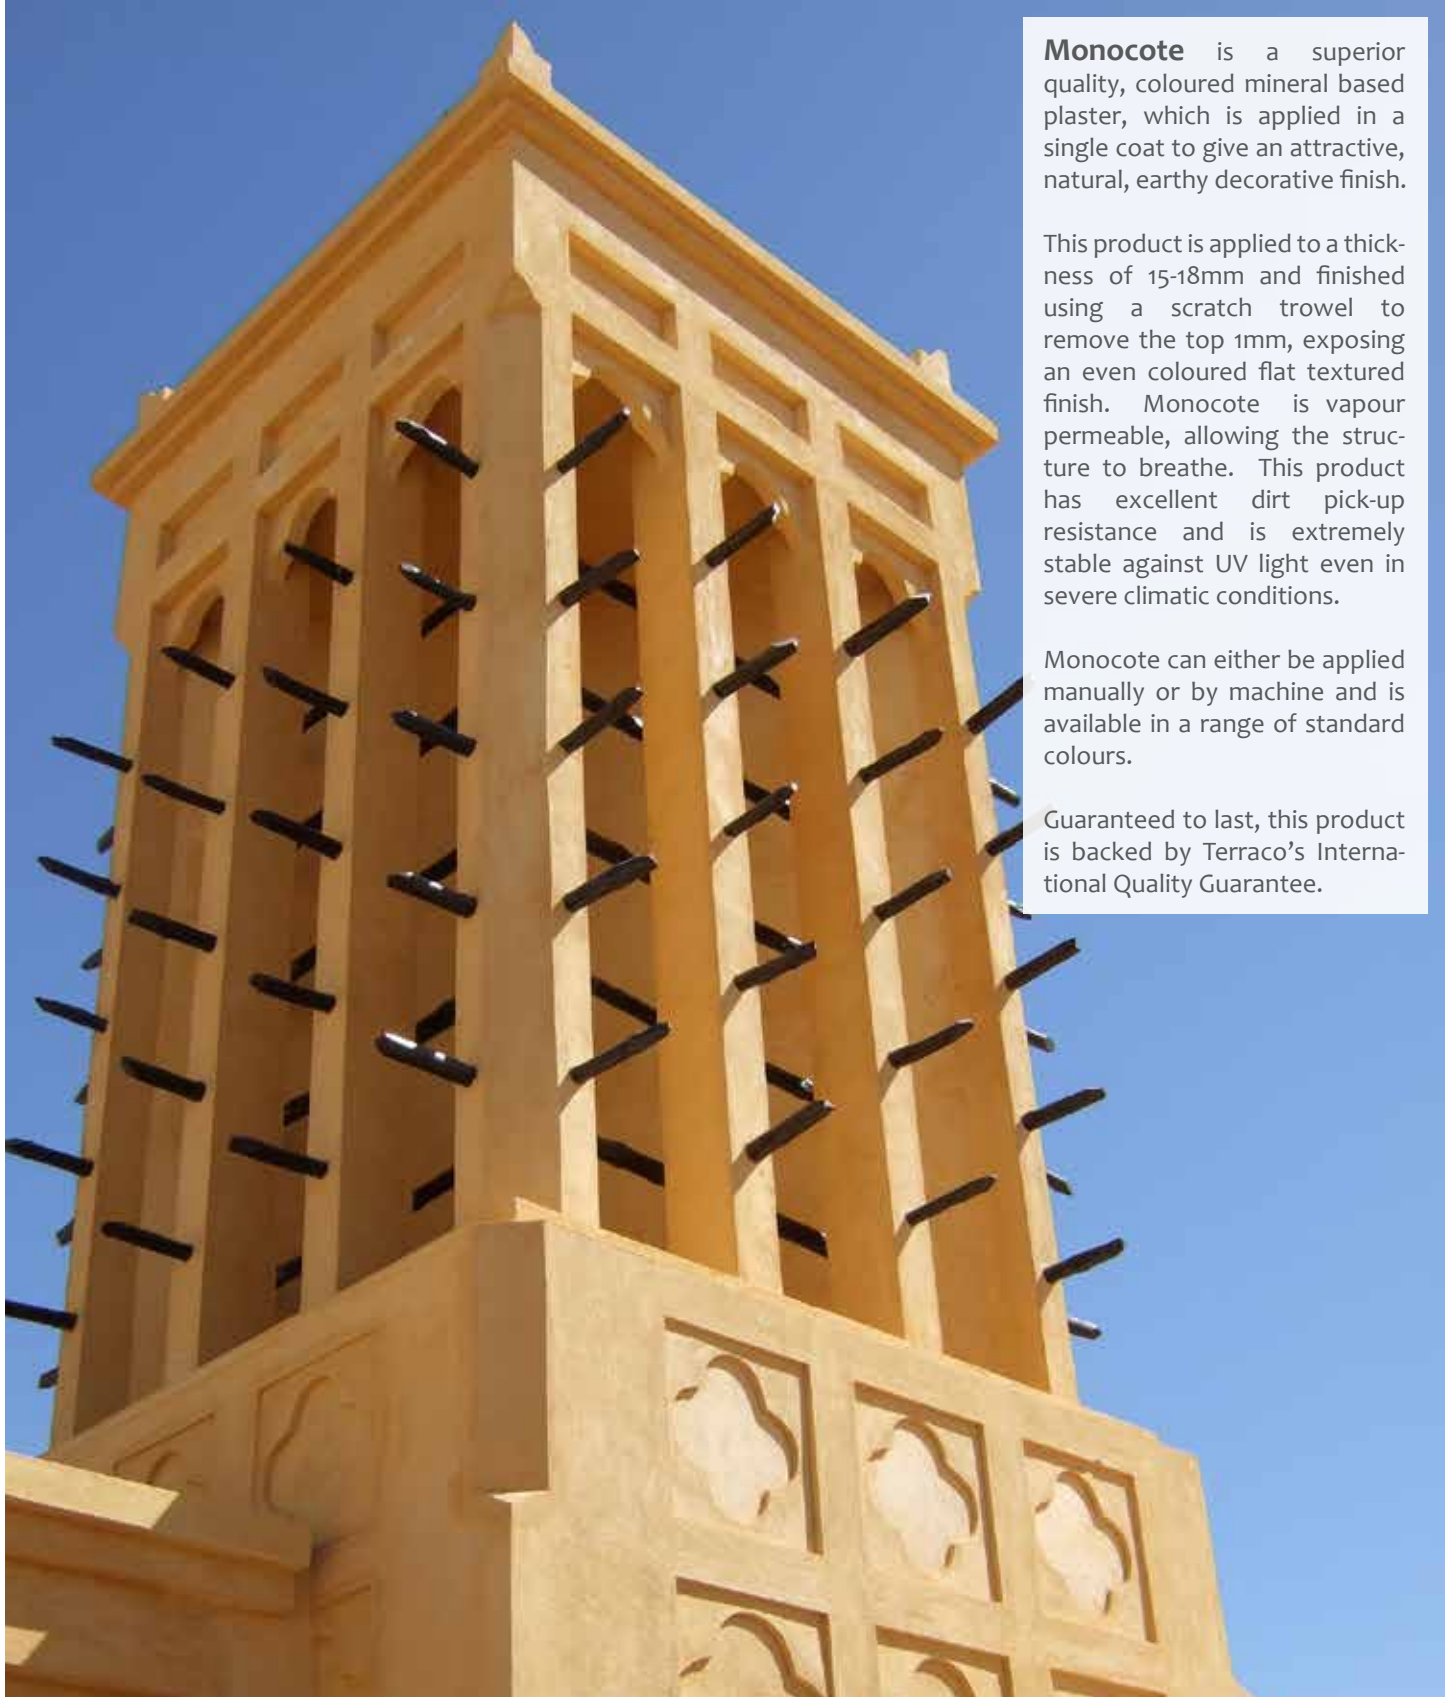

Monocote is a superior quality, coloured mineral based plaster, which is applied in a single coat to give an attractive, natural, earthy decorative finish.

This product is applied to a thickness of 15-18mm and finished using a scratch trowel to remove the top 1mm, exposing an even coloured flat textured finish. Monocote is vapour permeable, allowing the structure to breathe. This product has excellent dirt pick-up resistance and is extremely stable against UV light even in severe climatic conditions.

Monocote can either be applied manually or by machine and is available in a range of standard colours.

Guaranteed to last, this product is backed by Terraco's International Quality Guarantee.

Heritage Villas in Al Ain, U.A.E.

Front cover: (Left to Right) - Al Badia Hillside Residences, Festival City, Dubai, U.A.E.
- Bitnah Fort Museum, Fujairah, U.A.E.
- Heritage Villas, Al Ain, U.A.E.





Colour: MCT-410
Application:




Colour: MCT-331
Application:



Colour: MCT-423
Application:



Colour: MCT-429
Application:

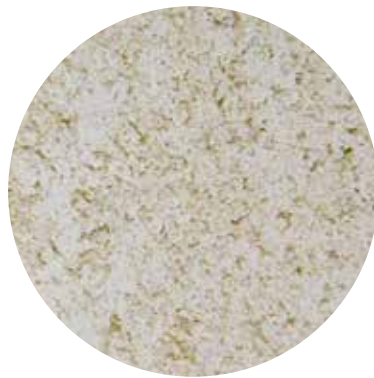

Colour: MCT-101
Application:



Colour: MCT-413
Application:



Colour: MCT-419
Application:



Colour: MCT-201
Application:



Colour: MCT-421
Application:



Colour: MCT-701
Application:



Colour: MCT-801
Application:



Colour: MCT-416
Application:

Product Name	MONOCOTE		EQUALISING COLOUR WASH
Description	Decorative single coat mineral plaster		Equalising colour wash for Terraco Monocote
Binders	Hydraulic		Acrylic
Filler Material	Crushed, precisely graded extenders		Precisely graded crushed marble
Pigments	Characterised as fast to light, lime, salt and cement		Characterised as fast to light, lime, salt and cement
Colours	12 standard colours		12 standard colours
Material Consumption	1.55 kg/m ² /mm thickness		0.1-0.2 ltr/m ²
Typical Coverage Rates		Thickness	Consumption (kg/m²)
	Clay Brick	15 - 20mm	23 - 31
	Concrete Blocks	12 - 15mm	18 - 23
	AAC Blocks	8 - 12mm	12 - 18
	Plastered Surfaces / fairface concrete surface*	6 - 12mm	9 - 18
	* Smooth surfaces should be roughened to ensure key for the Monocote application. Please refer to TDS.		N/A
Determination of Compressive Strength EN 1015-11:1999	Classified Class: CSIII		N/A
Adhesion to Concrete Block	>0.4MPa		N/A
Adhesion to Clay Block	>0.4MPa		N/A
Fire Rating	Class Mo (incombustible)		N/A
Application Method	Trowel or spray		Brush, roller or spray
Packaging	25 kg bag		4 litre & 20 litre jerricans
Storage	6 months in original unopened containers when stored according to manufacturer's instructions.		12 months in original unopened containers when stored according to manufacturer's instructions.
N.B. Terraco Equalising Colour Wash is a high quality colour equaliser suitable for application over Terraco Monocote to reduce the colour differences due to laitance.			
Please refer to applicable Technical Data Sheet before applying Terraco Monocote or Terraco Equalising Colour Wash. For additional technical information visit our website.			

V 8/2014



www.terraco.com

SWEDEN • UK • IRELAND • RUSSIA • TURKEY • JORDAN • EGYPT • UAE • PAKISTAN • THAILAND • VIETNAM • CHINA • KOREA