

**////// TERRACO<sup>®</sup>**

***Terracoat*** Decor





## Versatile high build texture

A tough high build matt textured coating that covers surface undulations and lasts long in all weather conditions.

Terracoat Decor is formulated with coarse sand aggregates which forms a thick durable coating. Its rich texture and in-built flexibility helps cover defects, minor cracks and undulations in the substrate.



## Extremely tough & durable

All Terracoat Decor products are formulated with an acrylic binder and special additives to give it outstanding strength. The product is tested and certified for its toughness and excellent surface durability.



## Excellent impact & abrasion resistance

All Terracoat Decor products are designed to withstand impact and abrasion in low lying areas of buildings which are exposed to everyday wear and tear.



## Excellent weather & UV resistance

All Terracoat Decor products have been developed to withstand extreme climatic conditions like the extreme heat of Middle Eastern deserts, severe monsoons of Asia and the harsh cold of the Scandinavian region.



## Excellent dirt pick-up resistance

Terracoat Sil Decor is specially formulated with a silicone binder that forms a strong film with excellent resistance to dirt and dust.



## Excellent for renovation & retrofit

Terracoat Flex Decor is specially formulated with an elastomeric binder which gives it enhanced flexibility over a wide range of temperatures. The coating can bridge cracks and cover minor damages which makes this a perfect solution for renovation and retrofit projects.



## Other Features and Benefits

- ◆ Outstanding flexibility which reduces the possibility of cracking and flaking.
- ◆ Good vapour permeability allows the substrate to breathe reducing water vapour damage.
- ◆ Water based and environmentally friendly.

## Terracoat Decor is perfect for

- ◆ Exterior applications.
- ◆ Disguising substrate imperfections.
- ◆ New work and renovation / retrofit projects
- ◆ All types of buildings – residential, commercial, leisure, educational, prefabricated, boundary walls and more.

## Areas of use

- ◆ Cementitious substrates
- ◆ Cement fibre boards
- ◆ Sprayplaster
- ◆ Concrete
- ◆ Blockwork
- ◆ Brickwork

## How to use


### New work

- 1 Roller apply 1 coat of Terraco P Primer or Tex Primer.
- 2 Allow to cure.
- 3 Apply Terracoat Decor based on required performance option.

### Renovation / Retrofit

- 1 All cracks, chips, voids and damages should be repaired with appropriate filler.
- 2 Prepare surface by removing loose or flaking paint, grease, dirt and grime.
- 3 Spot prime exposed areas appropriately.
- 4 Proceed as per new work.

**The product can be applied with roller or spray.**

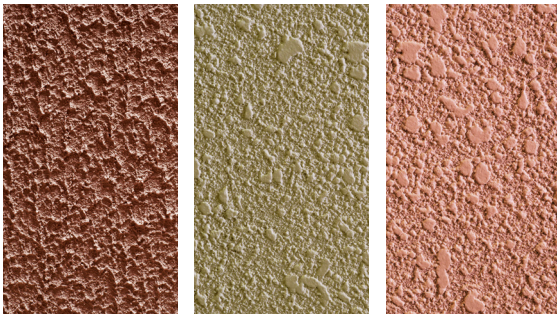

Roller

Spray & flattened

Spray & flattened

## Guideline Spread Rates

Onto cementitious substrate, cement fibre board.

Material Consumption	2.5 - 3.5 kg/m <sup>2</sup>
----------------------	-----------------------------

*\*Material consumption may vary depending on substrate conditions*

## Technical Data

Suitable Primer	Terraco P Primer or Tex Primer
Dilution / Thinning	Water if required
Drying Time	3 – 4 hours
Specific Gravity	1.65
Viscosity	55 – 65 cps
Colours	50 standard colours
Packaging	25 kg plastic pails
Storage	12 months in original unopened containers
Application Method	Roller or spray





[www.terraco.com](http://www.terraco.com)

SWEDEN • UK • IRELAND • RUSSIA • TURKEY • ALGERIA • EGYPT  
SOUTH AFRICA • JORDAN • UAE • THAILAND • VIETNAM • CHINA • KOREA