

////// TERRACO®



Handycoat® EZ-Joint™

INTERIOR READY-MIXED JOINTING COMPOUND



**EXCELLENT CRACK
RESISTANCE**

WHY CHOOSE HANDYCOAT EZ-JOINT?



Handycoat® EZ-Joint

Developed for efficient jointing of gypsum boards.

Handycoat EZ-Joint is an interior ready-mixed jointing compound specifically formulated for gypsum boards. It has excellent application properties and provides a superior bond for jointing with either paper tape or self-adhesive mesh. It is also used for fixing metal corner beading, for patching plaster cracks and as a general-purpose filler for cementitious surfaces.

Handycoat EZ-Joint is made from a selected blend of acrylic polymers and precisely graded fillers. This ensures easy handling and application, allows for excellent adhesion, and with low shrinkage offers excellent crack resistance



LOW SHRINKAGE

Handycoat EZ-Joint is specially formulated to provide low shrinkage properties compared to conventional jointing compounds. This promotes crack resistance and means less material is used to obtain a smooth uniform finish. Together with faster drying, Handycoat EZ-Joint helps you to save materials and time

EASY TO APPLY

Handycoat EZ-Joint is developed to help applicators with gypsum-board jointing in an easy and efficient way. The process is quick and straightforward resulting in a faster and more comfortable application experience

EXCELLENT ADHESION

The higher adhesion of Handycoat EZ-joint prevents flaking and together with other properties promotes crack resistance thus significantly improving the durability of the system.

OTHER FEATURES AND BENEFITS


- Quick drying compared to conventional jointing compounds resulting in faster application and saving time
- Vapor permeability coupled with high adhesion power prevents flaking thus reducing a need for repair

AREAS OF USE

- Gypsum Boards
- Interior Cement Boards
- Concrete Walls
- Plastered Concrete
- Cementitious Materials

HANDYCOAT EZ-JOINT IS PERFECT FOR

- Gypsum board jointing
- Fixing metal corner beading
- Patching plaster cracks
- Filling of cementitious surfaces
- Skimming of walls and ceilings

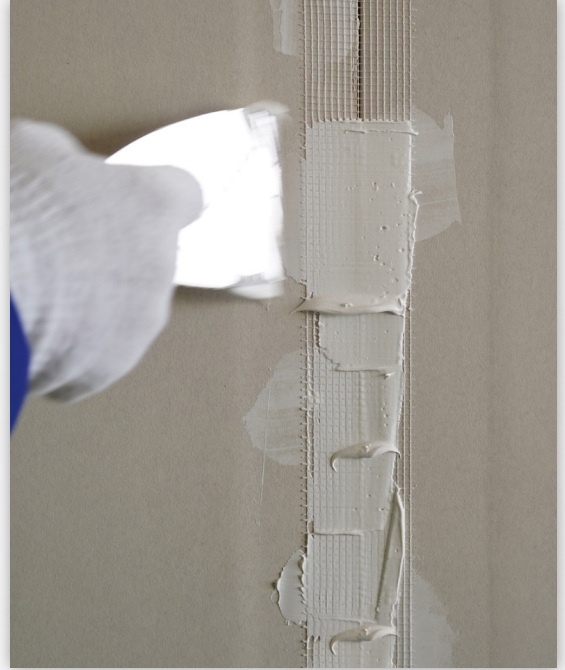

HOW TO USE

- 1 Apply a thin layer of material to the joint and embed the paper tape accordingly
- 2 When using self-adhesive mesh, apply it directly to the joint and fill with the material
- 3 Apply a further layer of material to smooth the surface
- 4 Skim the screw-heads with Handycoat EZ-Joint
- 5 Allow to dry fully and proceed for skimming

*For detailed usage instructions, please refer to the Technical Data Sheet

TECHNICAL DATA

Dilution	With water if required, up to 0.5 ltr/25 kg
Coverage	1.7 kg/m ²
Layer Thickness	Maximum thickness 3mm/layer
Specific Gravity	1.70
Colour	White
Standard Compliance	ASTM C-475
Packaging	5 and 25 kg plastic pails; 25 kg plastic bags
Storage	12 months in original unopened containers



www.terraco.com

SWEDEN • UK • IRELAND • RUSSIA • TURKEY • ALGERIA • EGYPT
JORDAN • UAE • THAILAND • VIETNAM • CHINA • KOREA